
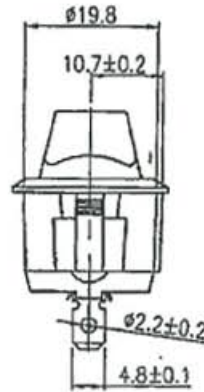
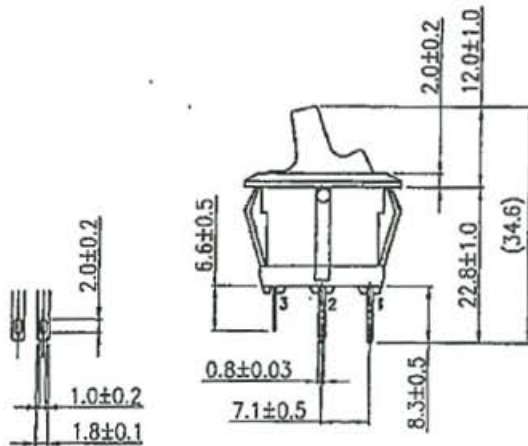


| | | | |
|-----------------------|----------------------------------|---------------|--|
| Rating | 20A 14V DC | Mounting Hole | |
| Contact Resistance | 50m ohm Max. | | |
| Insulation Resistance | DC 500V 100M ohm Min. | | |
| Dielectric Strength | AC 1500V 1 minute | | |
| Operation Temperature | -25°C ~ 85°C | | |
| Switch Function | 4P SPST ON-OFF (LED independent) | | |

Material:
 Frame: Black, Nylon 66
 Actuator: Black, Nylon 66
 LED: Red

Circuit Diagram



原稿
 2013.12.16
 研發部

Tolerances ±0.3 Unless Otherwise Specified

| Date | Name | Description | | | No. |
|---------|--------------------|--------------------|--------------|------------|---------------|
| Drawn | Checked | Approved | 1810610 | Model Name | ROCKER SWITCH |
| 周傑輝 | <i>[Signature]</i> | <i>[Signature]</i> | Customer No. | Model No. | R13-112LP-02 |
| 12/6/13 | 12/11-13 | 12/12-13 | Unit | mm | Rev. 0 |